


ST 65-6 CC PROFILE SHEET

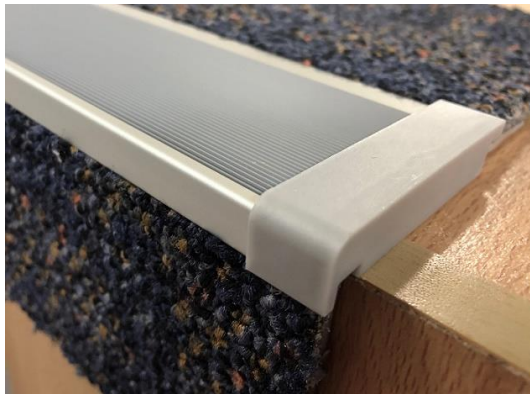

The ST 65-6 CC clear anodised aluminium stair nosing is 65mm on the tread with a 51mm PVC insert and a 10mm visible riser, it is suitable for carpet tiles and **6mm** direct stick carpet.

The stair nosing is designed to be fitted directly to a sub floor that is in good condition (smooth, level & clean) with the coverings/carpet tile base to be inserted into the back of the 4mm cut out and up the riser or alternatively some carpet layers will cut to the openings. This profile will have a 10mm exposed riser.

Available with or without end caps.

When installing use a zigzag of construction adhesive at the head of the step to assist in holding it in place and stop any movement. (Adhesive NOT supplied with supply only)

Drilled at approximately 230mm spacings.

Slip Test Results with PVC Insert = P4

Also available with an Aluminium Insert on request, Slip Test Results = P5

We recommend you seek the certifier's approval on the profile and insert colour as they all interpret the standards differently.

