



65 WELLINGTON ST RIVERSTONE NSW 2765

P.O. BOX 276, RIVERSTONE, NSW 2765


PH: (02) 9627 9747

EMAIL: INFO@SURETREAD.COM.AU

WWW.SURETREAD.COM.AU

ABN: 33 002 444 466

ST 65 SN Wedge MKII

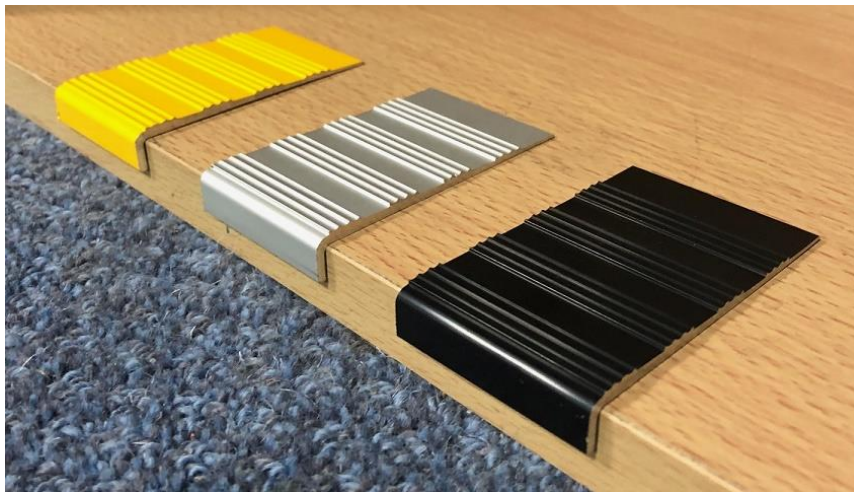

ST 65 SN Wedge MKII stair nosing is 65mm on top with a 10mm riser, this profile is designed to be adhesive fixed only (Sikaflex 11fc recommended) thus stairs would need to be blocked off for 12-24 hours to allow the adhesive to cure.

(Adhesive NOT supplied for a supply only)

Designed to be fitted direct to a square fronted concrete or timber step.

Stairs would need to be clean, smooth and level and straight.

Not suitable for use with floor coverings.

Slip Rating = P5

Available in Yellow Powder Coated, Clear Anodised or Black Anodised.

We recommend you seek the certifier's approval on the profile and contrast colour as they all interpret the standards differently.

