

# SURE TREAD

## STAIR NOSINGS

PTY. LTD.

65 WELLINGTON ST RIVERSTONE NSW 2765

P.O. BOX 276, RIVERSTONE, NSW 2765

PH: (02) 9627 9747


EMAIL: [INFO@SURETREAD.COM.AU](mailto:INFO@SURETREAD.COM.AU)

[WWW.SURETREAD.COM.AU](http://WWW.SURETREAD.COM.AU)

ABN: 33 002 444 466

## STB 74M - PROFILE SHEET

The STB 74M is a 75mm brass stair nosing which incorporates a 51mm pvc insert and has a 29.5mm riser.

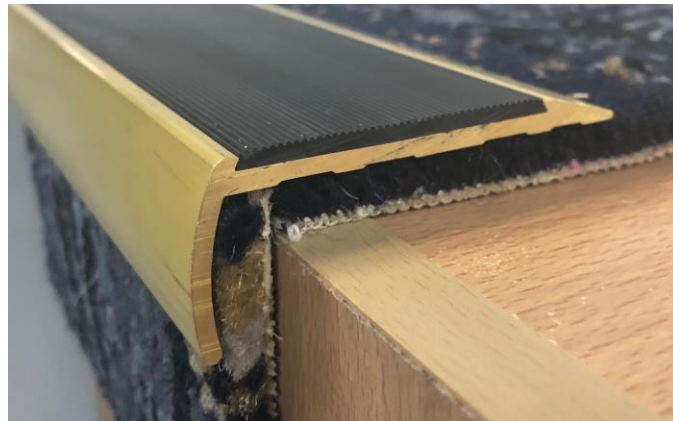

Due to the chamfered tail this profile can be fitted direct to concrete or timber as well as floor coverings such as carpet (no underlay), carpet tiles and vinyl.


Can be drilled and countersunk at approximately 250mm spacings.

Standard extruded finish.

Slip Rating = P3.

Internal use only.

We recommend you seek the certifier's approval on the profile and insert colour as they all interpret the standards differently.

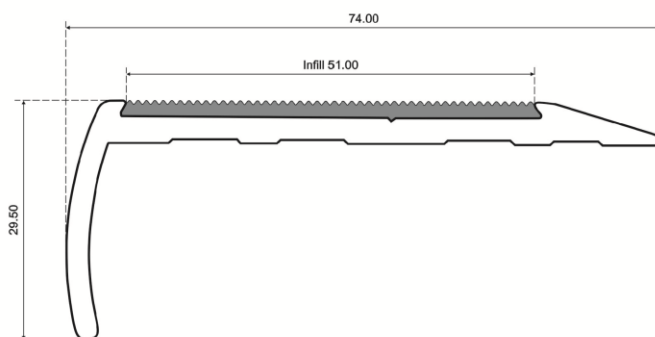

### Insert Colours

