
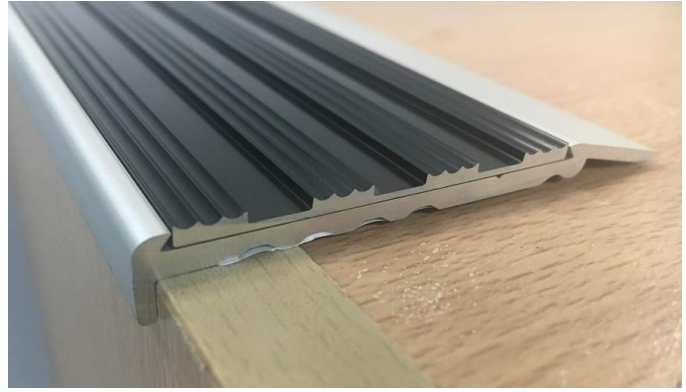


PROFILE SHEET

ST 74 SN with a 51mm Aluminium Insert

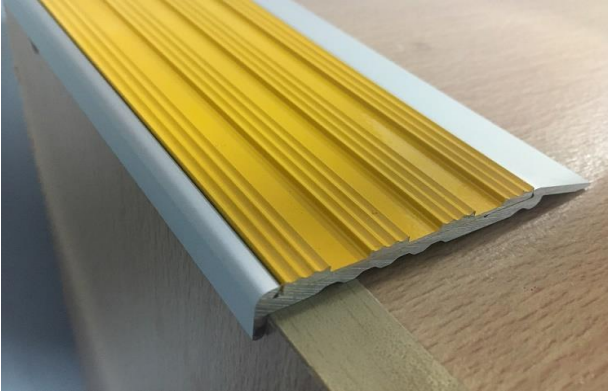

A 75mm square front clear anodised stair nosing which incorporates a 51mm Aluminium insert and has a 10mm riser.

Please Note: The underside of the riser is only 5mm.

To be fitted direct to square fronted concrete or timber steps.

Adhesive to be used under the nosing (Adhesive not supplied for a supply only)

Not suitable for soft floor coverings.

The sub floor must be in good condition (smooth, straight, level & clean)

End caps are NOT available.

Drilled at approximately 250mm spacings.

Suitable for external use.

Insert Slip Rating = P5

The Aluminium insert is available in Yellow Powder Coated, Clear Anodised, Black Anodised, Grey Powder Coated & White Powder Coated.

We recommend you seek the certifier's approval on the profile and insert colour as they all interpret the standards differently.

